


Heat Exchangers Assemblies

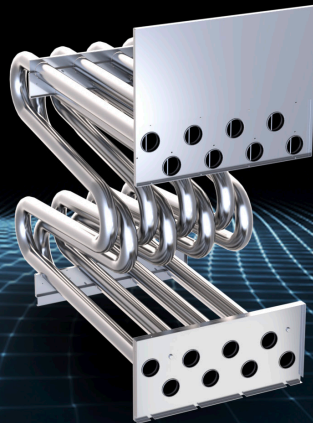

Product Overview

- Heat exchange assemblies for air-to-air
- Available in high or mid-efficiency units
- Available with vest-panel heat shield & gaskets
- Available with temperature limit switches
- Available with burner rack assemblies
- Dimple technology adds restriction and increases heating efficiency without the additional material cost of internal baffles

Market Segments

- Residential furnaces
- Commercial furnaces
- Commercial cooking

Technical Specifications

- Input range: up to 1.20 MBtu/h (350 kW)
- Tube diameters: 1.5" - 2.25" (38 - 57 mm)
- Material: Aluminized or varieties of stainless steel