


ULN Burners

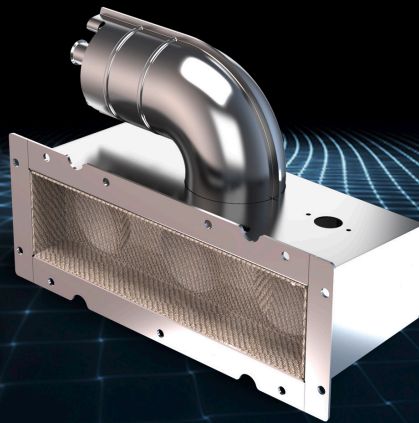

Product Overview

- Ultra-low NO_x (ULN) burner for furnace applications
- Fires into tubular heat exchangers
- Meets SCAQMD rule 1111 14 ng/J (50 mg/kWh) NO_x requirements
- Works on high and mid-efficiency units
- Fits in standard cabinet sizes
- Low operating noise
- Flexible design to fit a variety of furnace configurations

Market Segments

- Residential and light commercial furnaces

Technical Specifications

- Combustion type: Induced premix
- Input range: 40k - 100k Btu/h (11 - 29 kW)
- Size range:
 - Length: 7.5" - 16.5" (190 - 420 mm)
 - Width: 3.7 (94 mm)
- Material: Stainless steel